


STV 3500 G

Screeds



Technical data

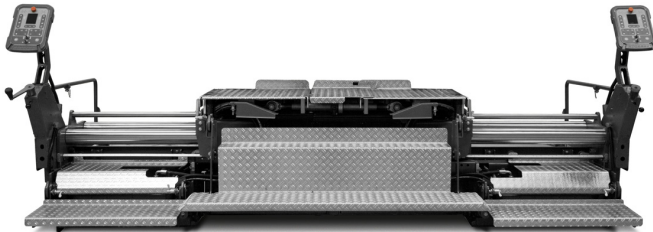

Masses

Mass (basic width)	1620 kg
Extension boxes (300 mm)	165 kg
Side shields, x2	190 kg



Dimensions

Basic width	1.75 m
Working width, minimum (with reducing shoe)	0.70 m
Working width, hydraulic extendable	3.50 m
Working width, max.	4.70 m
Bottom plates thickness	12 mm
Extension boxes	300 mm




Heating

Heating system	Propane (LPG)
Power, basic width	32.4 kW
Power, max width	46.8 kW



Compaction

Compacting elements	Tamper and Vibration
Crown profile	-2.5% up to +4.5%
Tamper frequency	1500 rpm
Vibration frequency	3000 rpm

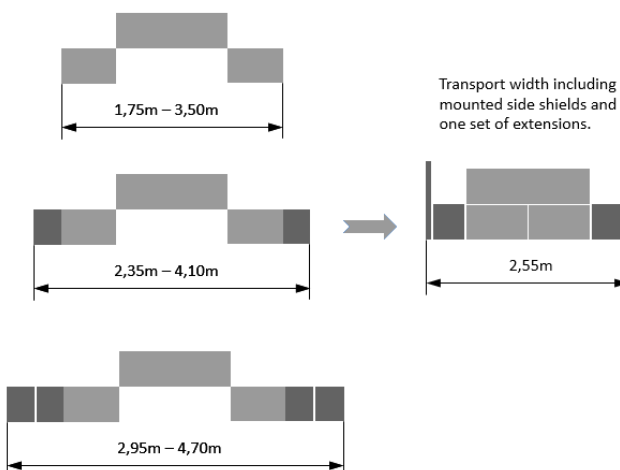

For additional product information and services please visit:

www.ammann-group.com

Specifications are subject to change.

MSS-2008-00-EN | © Ammann Group